

POWERED ACCESS



SCISSOR LIFTS - ELECTRIC

Battery operated machines suitable for use on various applications including: heating & ventilation, industrial maintenance, lifting materials with a technician, access in tight areas of narrow aisles.

- Zero inside turning radius; 90 degree steering allows for easy manoeuvrability in tight areas
- Platform extension provides enhanced versatility for outreach and loading
- Proportion controls for smooth, precise operation
- Narrow width allows access through single doorway



See page 4 for further details

Technical Information & Rates*

| Code | Additional Information | Week |
|--------|------------------------|--------|
| 268999 | 19E | P.O.A. |

| | |
|------------------------|---------|
| Reach Height | 7.8m |
| Platform Height | 5.8m |
| Length (Stowed) | 1.78m |
| Closed Height (Stowed) | 1.75m |
| Width | 0.81m |
| Lifting Capacity | 227kg |
| Roll Out Deck Ext | 0.9m |
| Weight | 1170kg |
| Power Supply | Battery |

*Subject to trade terms where applicable



SCISSOR LIFTS - ELECTRIC



See page 4 for further details

Technical Information & Rates*

| Code | Additional Information | Week |
|--------|------------------------|--------|
| 269006 | 32E | P.O.A. |

| | |
|------------------------|---------|
| Reach Height | 11.7m |
| Platform Height | 9.7m |
| Length (Stowed) | 2.31m |
| Closed Height (Stowed) | 1.96m |
| Width | 1.17m |
| Lifting Capacity | 318kg |
| Roll Out Deck Ext | 0.9m |
| Weight | 2300kg |
| Power Supply | Battery |

*Subject to trade terms where applicable



SCISSOR LIFTS - ELECTRIC



See page 4 for further details

Technical Information & Rates*

| Code | Additional Information | Week |
|--------|------------------------|--------|
| 269009 | 40E | P.O.A. |

| | |
|------------------------|-----------|
| Reach Height | 14.19m |
| Platform Height | 12.19m |
| Length (Stowed) | 3.1m |
| Closed Height (Stowed) | 2.01m |
| Width | 1.75m |
| Lifting Capacity | 360kg |
| Roll Out Deck Ext | 0.91m |
| Weight | 5300kg |
| Power Supply | Bi-Energy |

*Subject to trade terms where applicable



SCISSOR LIFTS - ELECTRIC



See page 4 for further details

Technical Information & Rates*

| Code | Additional Information | Week |
|--------|------------------------|--------|
| 675199 | 26NE | P.O.A. |

| | |
|------------------------|---------|
| Reach Height | 9.9m |
| Platform Height | 7.9m |
| Length (Stowed) | 2.32m |
| Closed Height (Stowed) | 1.94m |
| Width | 0.84m |
| Lifting Capacity | 227kg |
| Roll Out Deck Ext | 0.9m |
| Weight | 1864kg |
| Power Supply | Battery |

*Subject to trade terms where applicable



All machine specifications are intended as a guide only and should be confirmed at the time of hire

WORKING AT HEIGHT

It's important when working at any height to select the right equipment so that it gives you all the access you require, safely and within current regulations. For more information see pages 8-9.



Can't find what you're looking for?

Call our specialist Powered Access team on **0844 892 1874**

We recommend that risk assessments are carried out when using all types of Access Equipment. For more information on safe working at height, please see pages 8 - 9.



CALL 0844 892 1874



COLLECT VISIT YOUR LOCAL BRANCH



CLICK ORDER ONLINE

All prices shown exclude VAT. All product images and specifications are for representative purposes only and do not necessarily reflect the model available. All equipment is subject to availability.

SCISSOR LIFTS - DIESEL

Suitable for use on applications including: construction sites, installation and repair of roofing and cladding, plant and machinery installation and repair, general, outdoor building work.

- All wheel drive combines power and performance for increased productivity
- Expanded platform and lift capacity - provides up to 1.5m more work space
- Fold down guard rails for compact storage
- Outrigger/self levelling jack options are available. If these are required, please ensure that you state this at the time of hire

Technical Information & Rates*

| Code | Additional Information | Week |
|--------|------------------------|--------|
| 268983 | 26D | P.O.A. |

| | |
|------------------------|--------|
| Reach Height | 9.75m |
| Platform Height | 7.92m |
| Length (Stowed) | 2.67m |
| Closed Height (Stowed) | 1.7m |
| Width | 1.73m |
| Lifting Capacity | 567kg |
| Roll Out Deck Ext | 1.43m |
| Weight | 2971kg |
| Power Supply | Diesel |

*Subject to trade terms where applicable



See page 4 for further details

SCISSOR LIFTS - DIESEL

Technical Information & Rates*

| Code | Additional Information | Week |
|--------|------------------------|--------|
| 268988 | 32D | P.O.A. |

| | |
|------------------------|--------|
| Reach Height | 11.58m |
| Platform Height | 9.75m |
| Length (Stowed) | 2.67m |
| Closed Height (Stowed) | 1.83m |
| Width | 1.73m |
| Lifting Capacity | 454kg |
| Roll Out Deck Ext | 1.43m |
| Weight | 3411kg |
| Power Supply | Diesel |

*Subject to trade terms where applicable



See page 4 for further details

SCISSOR LIFTS - DIESEL

- Expanded platform and lift capacity - provides up to 2.0m more work space
- Fold down guard rails for compact storage
- Outrigger levelling option provides levelling capacity of 12 degrees side to side and 7 degrees front to back

Technical Information & Rates*

| Code | Additional Information | Week |
|--------|------------------------|--------|
| 268994 | 43D | P.O.A. |

| | |
|------------------------|------------|
| Reach Height | 15.11m |
| Platform Height | 13.11m |
| Length (Stowed) | 3.98m |
| Closed Height (Stowed) | 2.25m |
| Width | 2.29m |
| Lifting Capacity | 680kg |
| Roll Out Deck Ext | 1.93/1.63m |
| Weight | 5936kg |
| Power Supply | Diesel |

*Subject to trade terms where applicable



See page 4 for further details

SCISSOR LIFTS - DIESEL

Technical Information & Rates*

| Code | Additional Information | Week |
|--------|------------------------|--------|
| 675203 | 53D | P.O.A. |

| | |
|------------------------|------------|
| Reach Height | 18m |
| Platform Height | 16m |
| Length (Stowed) | 4.92m |
| Closed Height (Stowed) | 2.47m |
| Width | 2.29m |
| Lifting Capacity | 680kg |
| Roll Out Deck Ext | 1.93/1.63m |
| Weight | 7888kg |
| Power Supply | Diesel |

*Subject to trade terms where applicable



See page 4 for further details

All machine specifications are intended as a guide only and should be confirmed at the time of hire

FOR YOUR POWERED ACCESS NEEDS 0844 892 1874

We recommend that risk assessments are carried out when using all types of Access Equipment. For more information on safe working at height, please see pages 8 - 9.



CALL 0844 892 1874



COLLECT VISIT YOUR LOCAL BRANCH



CLICK ORDER ONLINE

All prices shown exclude VAT. All product images and specifications are for representative purposes only and do not necessarily reflect the model available. All equipment is subject to availability.



SAFE, FAST & FLEXIBLE

- Comprehensive range of powered access equipment available to hire
- All our hire equipment is regularly serviced and maintained for safety and reliability
- We can offer advice on safety issues and training courses plus, we can also provide safety harnesses for all equipment

BOOM LIFTS - ELECTRIC/BI-ENERGY

Suitable for use on applications including: building maintenance and repair, plant & machinery installation and repair, heavy usage, indoor and outdoor applications, large industrial facilities.

- Narrow design only 1.2m wide
- Excellent combination of drive speed, lift speed and gradeability result in increased productivity
- Proportional controls provide smooth operation for both drive and lift functions
- Minimal tail swing for work in congested areas

Technical Information & Rates*

| Code | Additional Information | Week |
|--------|------------------------|--------|
| 269027 | 300AJP | P.O.A. |

| | |
|--------------------------|-------------|
| Reach Height | 11.14m |
| Platform Height | 9.14m |
| Horizontal Outreach | 6.25m |
| Length (Stowed) | 5.59m |
| Closed Height (Stowed) | 2.01m |
| Width | 1.22m |
| Turning Radius | 1.52m |
| Rotation | 360 degrees |
| Cage Dimensions (Metres) | 1.22 x 0.76 |
| Lifting Capacity | 230kg |
| Weight | 7052kg |
| Power Supply | Battery |

*Subject to trade terms where applicable



See page 4 for further details

BOOM LIFTS - ELECTRIC/BI-ENERGY


- Revolutionary Bi-Energy system combines quiet, emission-free operation with the versatility of a diesel machine
- Drive enable system alerts the driver when the boom has rotated past 180 degrees
- Onboard generators allow a machine with a completely flat battery to be fully charged in only 3.5 hours
- Curtis Sep-Ex motor controller allows creation of either more torque or speed

Technical Information & Rates*

| Code | Additional Information | Week |
|--------|------------------------|--------|
| 269012 | Z45/25BE | P.O.A. |

| | |
|--------------------------|-------------|
| Reach Height | 15.8m |
| Platform Height | 13.8m |
| Horizontal Outreach | 7.5m |
| Length (Stowed) | 5.5m |
| Closed Height (Stowed) | 2m |
| Width | 1.8m |
| Turning Radius | 1.52m |
| Rotation | 360 degrees |
| Cage Dimensions (Metres) | 1.83 x 0.76 |
| Lifting Capacity | 227kg |
| Weight | 7031kg |
| Power Supply | Bi-fuel |

*Subject to trade terms where applicable

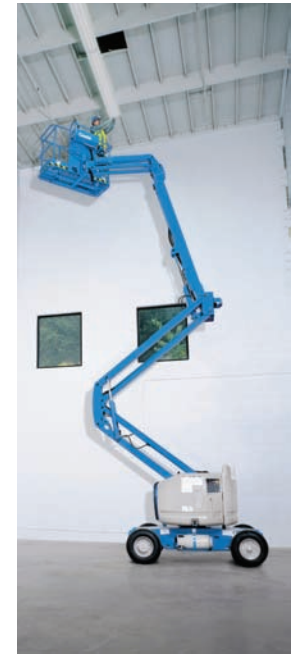

See page 4 for further details

BOOM LIFTS - ELECTRIC/BI-ENERGY

- Narrow 1.5m chassis allowing for operation in confined spaces
- Telescopic upper boom provides improved accuracy when positioning the platform
- Automatic fail-safe brakes for increased operator safety
- Dual harness points

Technical Information & Rates*

| Code | Additional Information | Week |
|--------|------------------------|--------|
| 674202 | HR12N | P.O.A. |

| | |
|--------------------------|-------------|
| Reach Height | 12m |
| Platform Height | 10m |
| Horizontal Outreach | 6.1m |
| Length (Stowed) | 3.99m |
| Closed Height (Stowed) | 1.9m |
| Width | 1.5m |
| Turning Radius | 2.22m |
| Rotation | 360 degrees |
| Cage Dimensions (Metres) | 1.1 x 0.85 |
| Lifting Capacity | 200kg |
| Weight | 3000kg |
| Power Supply | Bi-fuel |

*Subject to trade terms where applicable



See page 4 for further details

BOOM LIFTS - ELECTRIC/BI-ENERGY

- Telescopic upper boom provides improved accuracy when positioning the platform and superb manoeuvrability
- Automatic fail-safe brakes for increased operator safety
- Dual harness points
- Narrow 1.5m chassis allowing operation in confined areas

Technical Information & Rates*

| Code | Additional Information | Week |
|--------|------------------------|--------|
| 674210 | HR15N | P.O.A. |

| | |
|--------------------------|-------------|
| Reach Height | 15.6m |
| Platform Height | 13.6m |
| Horizontal Outreach | 9.6m |
| Length (Stowed) | 5.94m |
| Closed Height (Stowed) | 1.95m |
| Width | 1.5m |
| Turning Radius | 1.21m |
| Rotation | 360 degrees |
| Cage Dimensions (Metres) | 1.4 x 0.85 |
| Lifting Capacity | 225kg |
| Weight | 6400kg |
| Power Supply | Bi-fuel |

*Subject to trade terms where applicable



See page 4 for further details

We recommend that risk assessments are carried out when using all types of Access Equipment. For more information on safe working at height, please see pages 8 - 9.



CALL 0844 892 1874



COLLECT VISIT YOUR LOCAL BRANCH



CLICK ORDER ONLINE

All prices shown exclude VAT. All product images and specifications are for representative purposes only and do not necessarily reflect the model available. All equipment is subject to availability.

BOOM LIFTS - DIESEL

Suitable for use on applications including: building maintenance and repair, plant & machinery installation and repair, heavy usage, indoor and outdoor applications, large industrial facilities, dockside, shipbuilding and repair work, civil engineering projects.

- Full-time positive drive traction system and oscillating axle provide exceptional ability to cross rough terrain
- Excellent combination of drive speed, lift speed and gradeability result in increased productivity
- Proportional controls provide smooth operation for both drive and lift functions
- Minimal tail swing for work in congested areas

Technical Information & Rates*

| Code | Additional Information | Week |
|--------|------------------------|--------|
| 269016 | Z45/25RT | P.O.A. |

| | |
|--------------------------|-------------|
| Reach Height | 15.8m |
| Platform Height | 13.8m |
| Horizontal Outreach | 7.5m |
| Length (Stowed) | 5.5m |
| Closed Height (Stowed) | 2.08m |
| Width | 2.24m |
| Turning Radius | 1.37m |
| Rotation | 360 degrees |
| Cage Dimensions (Metres) | 1.83 x 0.76 |
| Lifting Capacity | 227kg |
| Weight | 6350kg |
| Power Supply | Diesel |

*Subject to trade terms where applicable



See page 4 for further details

BOOM LIFTS - DIESEL

Technical Information & Rates*

| Code | Additional Information | Week |
|--------|------------------------|--------|
| 269020 | Z60/34 | P.O.A. |

| | |
|--------------------------|----------------|
| Reach Height | 20.1m |
| Platform Height | 18.3m |
| Horizontal Outreach | 10.4m |
| Length (Stowed) | 7.9m |
| Closed Height (Stowed) | 2.5m |
| Width | 2.29m |
| Turning Radius | 3.3m |
| Rotation | 360 degrees |
| Cage Dimensions (Metres) | 1.82 x 0.76 |
| Lifting Capacity | 227kg |
| Weight | 9929kg |
| Power Supply | Diesel/Bi-fuel |

*Subject to trade terms where applicable



See page 4 for further details


BOOM LIFTS - DIESEL

Technical Information & Rates*

| Code | Additional Information | Week |
|--------|------------------------|--------|
| 269021 | S65 | P.O.A. |

| | |
|--------------------------|-------------|
| Reach Height | 21.6m |
| Platform Height | 19.8m |
| Horizontal Outreach | 17.2m |
| Length (Stowed) | 9.4m |
| Closed Height (Stowed) | 2.7m |
| Width | 2.4m |
| Turning Radius | 3.7m |
| Rotation | 360 degrees |
| Cage Dimensions (Metres) | 1.8 x 0.75 |
| Lifting Capacity | 227kg |
| Weight | 12882kg |
| Power Supply | Diesel |

*Subject to trade terms where applicable

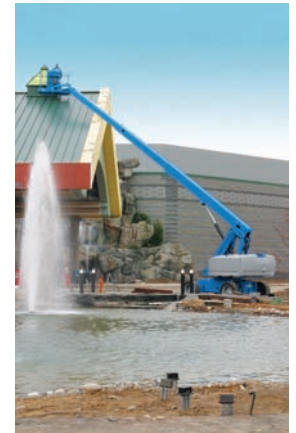

See page 4 for further details

BOOM LIFTS - DIESEL

Technical Information & Rates*

| Code | Additional Information | Week |
|--------|------------------------|--------|
| 269023 | S85 | P.O.A. |

| | |
|--------------------------|-------------|
| Reach Height | 27.9m |
| Platform Height | 25.9m |
| Horizontal Outreach | 23.4m |
| Length (Stowed) | 12.4m |
| Closed Height (Stowed) | 2.8m |
| Width | 3/2.4m |
| Turning Radius | 3.2m |
| Rotation | 360 degrees |
| Cage Dimensions (Metres) | 1.83 x 0.76 |
| Lifting Capacity | 227kg |
| Weight | 16266kg |
| Power Supply | Diesel |

*Subject to trade terms where applicable



See page 4 for further details

All machine specifications are intended as a guide only and should be confirmed at the time of hire

FOR YOUR POWERED ACCESS NEEDS 0844 892 1874

We recommend that risk assessments are carried out when using all types of Access Equipment. For more information on safe working at height, please see pages 8 - 9.



CALL 0844 892 1874



COLLECT VISIT YOUR LOCAL BRANCH



CLICK ORDER ONLINE

All prices shown exclude VAT. All product images and specifications are for representative purposes only and do not necessarily reflect the model available. All equipment is subject to availability.

LOW LEVEL ACCESS

Suitable for use on applications including: heating & ventilation maintenance, industrial maintenance, air conditioning maintenance, supermarkets, hotels, offices.

- Provides safe alternative to aluminium towers
- Compact & light, allowing access to multifloor buildings via elevators
- Narrow width allows access through single doorway
- Simple to operate
- Battery powered for quiet, emission-free operation



See page 4 for further details

Technical Information & Rates*

| Code | Additional Information | Week |
|--------|------------------------|--------|
| 675196 | Power Tower | P.O.A. |

| | | | |
|------------------------|-------|-------------------|---------|
| Reach Height | 5.1m | Lifting Capacity | 250kg |
| Platform Height | 3.1m | Roll Out Deck Ext | N/A |
| Length (Stowed) | 1.52m | Weight | 310kg |
| Closed Height (Stowed) | 1.8m | Power Supply | Battery |
| Width | 0.78m | | |

*Subject to trade terms where applicable

LOW LEVEL ACCESS



See page 4 for further details

Technical Information & Rates*

| Code | Additional Information | Week |
|--------|------------------------|--------|
| 675197 | The Whizz | P.O.A. |

| | | | |
|------------------------|-------|-------------------|---------|
| Reach Height | 4.9m | Lifting Capacity | 180kg |
| Platform Height | 2.9m | Roll Out Deck Ext | 0.59m |
| Length (Stowed) | 1.22m | Weight | 450kg |
| Closed Height (Stowed) | 1.69m | Power Supply | Battery |
| Width | 0.76m | | |

*Subject to trade terms where applicable



LOW LEVEL ACCESS



See page 4 for further details

Technical Information & Rates*

| Code | Additional Information | Week |
|--------|------------------------|--------|
| 269002 | GR20 | P.O.A. |

| | | | |
|------------------------|-------|-------------------|---------|
| Reach Height | 8.07m | Lifting Capacity | 159kg |
| Platform Height | 6.07m | Roll Out Deck Ext | N/A |
| Length (Stowed) | 1.35m | Weight | 1112kg |
| Closed Height (Stowed) | 1.98m | Power Supply | Battery |
| Width | 0.8m | | |

*Subject to trade terms where applicable



LOW LEVEL ACCESS



See page 4 for further details

Technical Information & Rates*

| Code | Additional Information | Week |
|--------|------------------------|--------|
| 600907 | Nano | P.O.A. |

| | | | |
|------------------------|-------|-------------------|---------|
| Reach Height | 4.5m | Lifting Capacity | 200kg |
| Platform Height | 2.5m | Roll Out Deck Ext | N/A |
| Length (Stowed) | 1.20m | Weight | 285kg |
| Closed Height (Stowed) | 1.56m | Power Supply | Battery |
| Width | 0.75m | | |

*Subject to trade terms where applicable



VEHICLE MOUNTED PLATFORMS

Suitable for use on applications including: high level building maintenance, roof/gutter inspection work, industrial cleaning, media work, working from highways.

- Electro hydraulic control system
- Signal lights for outriggers and booms in transport position
- Safety switches for extension chains
- Double safety switches for outreach limitation and rotation
- Battery powered back up system for hydraulics



See page 4 for further details

Technical Information & Rates*

| Code | Additional Information | Week |
|--------|------------------------|--------|
| 674159 | T34 | P.O.A. |

| | | | |
|------------------------|-------|--------------------------|---------|
| Reach Height | 34m | Width - Fully Jacked | 5.1m |
| Platform Height | 32m | Width - One Side Jacked | 3.8m |
| Horizontal Outreach | 24.7m | Lifting Capacity | 280kg |
| Length (Stowed) | 9.5m | Cage Dimensions (Metres) | 1 x 1.8 |
| Closed Height (Stowed) | 3.7m | Weight | 18000kg |
| Width | 2.5m | | |

*Subject to trade terms where applicable

All machine specifications are intended as a guide only and should be confirmed at the time of hire

FOR YOUR POWERED ACCESS NEEDS 0844 892 1874



CALL 0844 892 1874



COLLECT VISIT YOUR LOCAL BRANCH



CLICK ORDER ONLINE

All prices shown exclude VAT. All product images and specifications are for representative purposes only and do not necessarily reflect the model available. All equipment is subject to availability.

VEHICLE MOUNTED PLATFORMS



See page 4 for further details

Technical Information & Rates*

| Code | Additional Information | Week |
|--------|------------------------|--------|
| 674125 | T20 | P.O.A. |

| | | | |
|------------------------|-------|--------------------------|-----------|
| Reach Height | 20m | Width | 2m |
| Platform Height | 18m | Width (Working) | 2.6m |
| Horizontal Outreach | 9.9m | Lifting Capacity | 200kg |
| Length (Stowed) | 7.45m | Cage Dimensions (Metres) | 1.2 x 0.8 |
| Closed Height (Stowed) | 3.1m | Weight | 3500kg |

*Subject to trade terms where applicable



VEHICLE MOUNTED PLATFORMS



See page 4 for further details

Technical Information & Rates*

| Code | Additional Information | Week |
|--------|------------------------|--------|
| 674178 | T44 HD | P.O.A. |

| | | | |
|------------------------|-------|--------------------------|-----------|
| Reach Height | 44m | Width - Fully Jacked | 6m |
| Platform Height | 42m | Width - One Side Jacked | 4.5m |
| Horizontal Outreach | 30m | Lifting Capacity | 400kg |
| Length (Stowed) | 10.8m | Cage Dimensions (Metres) | 0.9 x 3.6 |
| Closed Height (Stowed) | 4m | Weight | 32000kg |
| Width | 2.5m | | |

*Subject to trade terms where applicable



ACCESS PLATFORM (BATTERY POWERED)

Gives easy access to areas out of reach from conventional ladders and scaffolding towers.

- Reaches heights of 12m
- Battery powered, complete with in-built charger
- Towable



See page 4 for further details

Technical Information & Rates*

| Code | Additional Information | Weight | Week |
|------|------------------------|--------|--------|
| 5120 | - | 1400kg | P.O.A. |

*Subject to trade terms where applicable



We recommend that risk assessments are carried out when using all types of Access Equipment. For more information on safe working at height, please see pages 8 - 9.



CALL 0844 892 1874



COLLECT VISIT YOUR LOCAL BRANCH